

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
14 June 2001 (14.06.2001)

PCT

(10) International Publication Number  
**WO 01/41950 A2**

- (51) International Patent Classification<sup>7</sup>: **B21D 26/00** (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (21) International Application Number: PCT/US00/42687
- (22) International Filing Date: 7 December 2000 (07.12.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/459,756 10 December 1999 (10.12.1999) US
- (71) Applicant: **L & L PRODUCTS, INC.** [US/US]; 159 McLean Drive, Romeo, MI 48065 (US).
- (72) Inventor: **CZAPLICKI, Michael, J.**; 1035 Pointe Place, Rochester, MI 48307 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— Without international search report and to be republished upon receipt of that report.
- (74) Agent: **DOBRUSIN, Eric, M.**; Dobrusin Darden Then-nisch & Lorenz PLLC, 401 South Old Woodward Avenue, Suite 311, Birmingham, MI 48009 (US).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: **HEAT-ACTIVATED STRUCTURAL FOAM REINFORCED HYDROFORM**

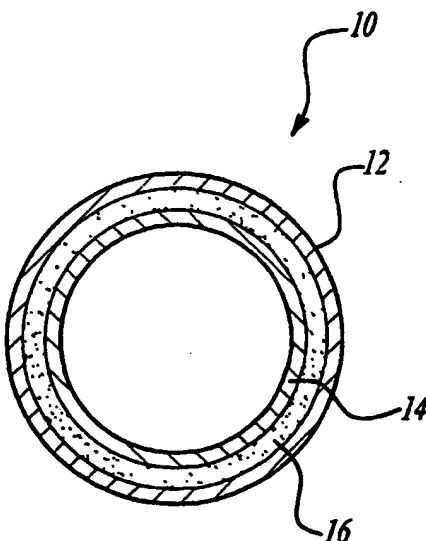

(57) Abstract: A reinforced hydroform member (10) having an outer structural member (12) reinforced by a structural foam (16) over an inner structural member (14). The structural foam (16) extends along at least a portion of the length of the outer structural member (14). The structural foam (16) is a heat-activated epoxy-based resin. As the foam is heated, it expands and adheres to adjacent surfaces.

WO 01/41950 A2

**HEAT-ACTIVATED STRUCTURAL FOAM REINFORCED HYDROFORM****FIELD OF THE INVENTION**

The present invention relates generally to a heat-activated foam reinforced structural member. More particularly, the invention relates to a structural foam reinforced hydroform structures, wherein the structural foam becomes chemically active and expands upon heating.

**BACKGROUND OF THE INVENTION**

Traditionally, hydroforming techniques are used to draw and shape metal tubes. Conventional hydroforming techniques often involve two steps: (1) placing the desired bends in the tube and (2) forming the tube to the desired configuration. Step 2 usually requires placing a tubular member having an open bore in a mold and pinching off the ends of the tube. A pressurized liquid is injected into the open bore, causing the tube to stretch and expand out against the mold.

The advantage of the hydroforming process is that it allows formation of relatively long tubular structures having a seamless perimeter. This process eliminates the cost of welding or machining operations often used to shape the part in the desired configuration. As a result, a hydroform oftentimes has a high length to diameter ratio. For instance, a hydroform structure may have a length in excess of 15' and a diameter ranging from approximately 3/4" to more than 12". It is not unusual for a hydroform structure to exceed the length of other tubular members, such as torsion bars or tubular bars, formed using other processes.

Additionally, hydroforms are complex structural shapes that typically include bends and contour changes. Often the number of bends and contour changes in a hydroformed bar are greater and more complex than those found in torsion bars or other tubular structures formed using different techniques.

Hydroform structures typically have a constant wall thickness prior to forming, and thus tend to develop weak spots at the site of bends or changes in contour, as well as at certain locations along a long tubular section. Thus, hydroform sections are generally reinforced to improve their structural stiffness and strength.

Traditional ways of reinforcing tubular structures such as hydroforms include sliding a metal sleeve inside the tube and welding the reinforcing member in place. However, because the hydroform often includes one or more bends or one or more changes in contour, it is often difficult to insert the sleeve into the hydroform at the site of weak spots. Other

techniques include reinforcing the hydroform from the outside by welding the sleeve onto the outside of the hydroform. However, hydroforms are often used in applications having very close tolerances, resulting in little or no clearance for an externally placed reinforcing member.

5           Additionally, in many operations the weight of the tubular member is critical and must be kept low as possible. Thus, the use of an external sleeve adds unwanted weight to the tubular assembly. Finally, the welding operation tends to be labor intensive, time consuming and inexact, increasing the cost of forming the hydroform member and producing parts that have questionable reliability.

10           Consequently, there is needed a device and method for reinforcing the weak areas of hydroform tubes without significantly increasing the weight and manufacturing complexity.

### SUMMARY OF THE INVENTION

15           The invention relates to a reinforced hydroform member. In one embodiment, the hydroform member includes an outer structural member having an open bore; and a structural foam supported by the outer structural member. The foam extends along at least a portion of the length of the outer structural member, and may fill at least a portion of the length of the bore.

20           The structural foam is generally and preferably a heat-activated epoxy-based resin. As the foam is heated, it expands and adheres to adjacent surfaces. The preferred structural foam material is commercially available from L&L Products of Romeo, Michigan under the designation L5206, L5207, L5208, or L5209.

25           In an alternative embodiment, the hydroform member includes an inner structural member having an open section, wherein the inner structural member is received in the bore of the outer structural member. The outer structural member and the inner structural member are fabricated of metal, and the structural foam extends along at least a portion of the length of the inner structural member and the outer structural member.

30           In still another embodiment, the reinforced hydroform includes an outer elongated tubular bar having a open center; an elongated inner tubular bar having an open bore coextensive therewith such that the inner tubular bar is received in the open center of the outer tubular bar so as to extend concentrically therewith; and a structural foam supported by the outer surface of the inner tubular bar, wherein the structural foam extends along at least a portion of the length of the inner structural member.

The reinforced hydroform may be formed by (1) providing an outer structural member having an open bore; (2) reinforcing the outer structural member by applying a structural foam thereto; (3) reshaping the outer structural member, causing the exterior surface of the outer structural member to assume a desired configuration; and (4) heating the structural foam to a temperature sufficient to cause the structural foam to expand and adhere to adjacent surfaces.

Where the hydroform includes an inner structural member, the method of forming the reinforced hydroform further includes the step of providing an inner structural member that is received in the open bore of the outer structural member so as to form a structural assembly.

The structural assembly is reinforced by applying the structural foam thereto.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

The features and inventive aspects of the present invention will become more apparent upon reading the following detailed description, claims and drawings, of which the following is a brief description:

FIG. 1 is a perspective view of an automobile, showing a portion of the automobile frame reinforced by the hydroform member.

FIG. 2 is a perspective view showing a reinforced hydroform tube formed in accordance with the teachings of the present invention.

FIG. 3 is a section view of the hydroform tube described in FIG. 2, showing the position of the foam in the uncured state.

FIG. 4 is a section view of the hydroform tube described in FIG. 2, showing the position of the foam in the cured state.

FIG. 5 is a side section view showing the hydroform tube described in FIG. 2.

### **DESCRIPTION OF THE PREFERRED EMBODIMENT**

FIG. 1 shows a reinforced hydroform member 10 formed in accordance with the teachings of the present invention. The hydroform member 10 imparts increased strength or stiffness to a structural member, and, thus, may be used in a variety of applications. For instance, the reinforced hydroform member 10 may be used as part of the frame system for automobiles or building structures.

The hydroform member 10 includes an outer metal tube 12 and an inner concentric tube 14. The outer tube 12 includes an open center and preferably has a seamless outer perimeter. Although FIG. 2 shows the tube 12 as having a circular cross-section and an open

center, other geometric configurations having a continuous perimeter and an open portion therein may be used to form the tube 12. In the preferred embodiment, the outer tube 12 is fabricated of steel. However, it will be appreciated that other materials capable of plastic deformation may be used.

5           The physical dimensions of the outer tube 12 will vary depending on the intended use of the hydroform member 10. Where the hydroform member 10 is used as part of an automobile framing system, the outer tube 12 may have a length in excess of 15' and an inner diameter typically ranging from approximately  $\frac{3}{4}$ " to 12". For an outer tube 12 having these dimensions, the outer tube 12 has a constant wall thickness prior to any deformation. The  
10 wall thickness of tube chosen will vary depending on the function and structure of the element being reinforced.

          The inner tube 14 is received in the open center of the outer tube 12. Preferably, the inner tube 14 is concentrically received in the open center of the outer tube 12, and extends axially along the length of the outer tube 12 such that each end of the inner tube 14 is  
15 substantially flush with the respective ends of the outer tube 12.

          In the preferred embodiment, the inner tube 14 has an open center and a seamless outer perimeter. Although FIG. 2 shows the tube 14 as having a circular cross-section and an open center, other geometric configurations having a continuous perimeter and an open portion therein may be used to form the tube 14. The preferred material from which to  
20 fabricate the inner tube 14 is steel. However, other materials capable of plastic deformation, particularly aluminum, may be used.

          The physical dimensions of the inner tube 14 will vary depending on the intended use of the hydroform member 10. Where the hydroform member 10 is used as part of an automobile framing system, the inner tube 14 may have a length in excess of 15'. The inner  
25 diameter typically has a value ranging between approximately 1" and 12" and a constant wall thickness generally having a specific value ranging between 0.030" and 0.30".

          As best seen in FIG. 2, the inner tube 14 supports a reinforcing structural foam 16 along at least a portion of the outer perimeter thereof. The primary purpose of the structural foam 16 is to increase the structural strength and stiffness of the components being  
30 reinforced. Typically, the structural foam 16 is applied to a carrier in the areas where reinforcement is needed. When dealing with hydroforms, the areas generally needing reinforcement are locations where the surface bends or changes contour. In the preferred embodiment, the structural foam 16 increases the compressive strength, bending strength,

and structural stiffness of the hydroform 10 without adding significantly to the overall weight of the hydroform 10.

The structural foam 16 is preferably heat-activated and expands and cures upon heating, typically by a foaming and cross-linking reactions. The structural foam 16 is generally applied to the tube 14 in a solid or semi-solid state. The structural foam 16 may be applied to the outer perimeter of the tube 14 in a fluid state using commonly known injection techniques, wherein the structural foam 16 is heated to a temperature that permits the structural foam 16 to flow slightly. Upon cooling the structural foam 16 hardens and adheres to the outer surface of the tube 14. Alternatively, the structural foam 16 may be applied to the tube 14 as precast pellets, which are heated slightly to permit the pellets to bond to the outer surface of the tube 14. At this stage, the structural foam 16 is heated just enough to cause the structural foam 16 to flow slightly, but not enough to cause the structural foam 16 to thermally expand. Additionally, the structural foam may also be applied by heat bonding/thermoforming and by co-extrusion. Note that other expandable sheet materials can be used, such as, without limitation, an encapsulated mixture of materials that, when activated by temperature, pressure, chemically, or other by other ambient conditions, will expand.

The structural foam 16 is an epoxy-based material, but may include an ethylene copolymer or terpolymer, such as with an alpha-olefin. As a copolymer or terpolymer, the molecule is composed of two or three different monomers, i.e., small molecules with high chemical reactivity that are capable of linking up with similar molecules.

A number of epoxy-based structural reinforcing foams are known in the art and may also be used to produce the structural foam 16. A typical structural foam includes a polymeric base material, such as an epoxy resin or ethylene-based polymer which, when compounded with appropriate ingredients (typically a blowing agent and perhaps a curing agent and filler), expands and cures in a reliable and predictable manner upon the application of heat or another activation stimulus. The resulting material has a low density and sufficient stiffness to impart desired rigidity to a supported article. From a chemical standpoint for a thermally-activated material, the structural foam 16 is usually initially processed as a thermoplastic material before curing. After curing, the structural foam 16 typically becomes a thermoset material.

An example of a preferred structural foam 16 formulation is an epoxy-based material that may include an ethylene copolymer or terpolymer that is commercially available from L&L Products of Romeo, Michigan, under the designations L5206, L5207, L5208 and

L5209. One advantage of the preferred structural foam materials 18 over prior art materials is the preferred materials can be processed in several ways. The preferred materials can be processed by injection molding, extrusion or with a mini-applicator extruder. This enables the creation of part designs that exceed the capability of most prior art materials.

5           While the preferred materials for fabricating the structural foam 16 have been disclosed, the structural foam 16 can be formed of other materials provided that the material selected is heat-activated or otherwise activated by an ambient condition (e.g. moisture, pressure, time or the like) and expands in a predictable and reliable manner under appropriate conditions for the selected application. One such material is the epoxy based resin disclosed  
10 in U.S. Patent Application Serial No. 09/268,810, the teachings of which are incorporated herein by reference, filed with the United States Patent and Trademark Office on March 8, 1999 by the assignee of this application. Some other possible materials include, but are not limited to, polyolefin materials, copolymers and terpolymers with at least one monomer type an alpha-olefin, phenol/formaldehyde materials, phenoxy materials, and polyurethane  
15 materials with high glass transition temperatures. See also, U.S. Patent Nos. 5,766,719; 5,755,486; 5,575,526; 5,932,680 (incorporated herein by reference). In general, the desired characteristics of the structural foam 16 include high stiffness, high strength, high glass transition temperature (typically greater than 70 degrees Celsius), and good corrosion and humidity resistance properties.

20           In applications where a heat activated, thermally expanding material is employed, an important consideration involved with the selection and formulation of the material comprising the structural foam 16 is the temperature at which a material reaction or expansion, and possibly curing, will take place. For instance, in most applications, it is undesirable for the material to be active at room temperature or otherwise at the ambient  
25 temperature in a production line environment. More typically, the structural foam 16 becomes reactive at higher processing temperatures, such as those encountered in an automobile assembly plant, when the foam 16 is processed along with the automobile components at elevated temperatures or at higher applied energy levels. While temperatures encountered in an automobile assembly body shop may be in the range of 148.89 °C to  
30 204.44 °C (300 °F to 400 °F), body and paint shop applications are commonly about 93.33 °C (215 °F) or slightly higher. If needed, blowing agents can be incorporated into the composition to cause expansion at different temperatures outside the above ranges.

Generally, prior art expandable foams have a range of expansion ranging from approximately 0 to over 1000 percent. The level of expansion of the structural foam 16 may be increased to as high as 1500 percent or more, but is typically between 0% and 300%.

5 The hydroform member 10 may be used in a variety of applications where structural reinforcement is desired. The hydroform member 10 has particular application in those instances where the overall weight of the structure being reinforced is a critical factor. For instance, the hydroform member may be used to increase the structural strength of aircraft frames, marine vehicles, automobile frames, building structures or other similar objects. In the embodiment disclosed the hydroform member 10 is used as part of an automobile frame  
10 to reinforce selected areas of the automobile frame.

As best illustrated in FIG. 1, the hydroform member 10 is coupled to the frame portion of an automobile frame assembly. The frame portion to be reinforced by the hydroform member 10 is illustrated by the phantom lines. It will be appreciated that the hydroform 10 may be used to reinforce other areas of an automobile frame.

15

#### **Method of Forming the Hydroform 10**

The method of forming the hydroform member 10 includes applying the structural foam 16 to the outer perimeter of the inner tube 14. The structural foam 16 is applied to the inner tube 14 using the techniques previously discussed.

20 The inner tube 14 is then received in the open center of the outer tube 12. The tube assembly 12, 14 is reshaped to include any desired bends, twists or contour changes. One particular method in which the tube assembly 12, 14 could be deformed is by first inserting the inner tube 14 into the outer tube 12 to be hydroformed and then bending the outer tube 12 to lock the inner tube 14 into place. After completion of the bending process, the tube  
25 assembly 12, 14 is placed in a mold and each end of the tube assembly 12, 14 is sealed using known techniques. For instance, an end cap (not shown) is inserted over each end of the tubular members 12, 14, and one end of a kick bolt (not shown) is coupled to one of the end caps and the other end to a fluid source under pressure.

30 Next, a hydroforming process is employed to reshape and to stretch the tubular assembly 12, 14 to the desired configuration. It will be appreciated that hydroforming, sometimes referred to as fluid forming or rubber diaphragm forming, is a known process for drawing and shaping metal components. The hydroforming process explained herein is for illustrative purposes only, and it will be appreciated that other hydroforming techniques may be used.



The hydroforming process employed in practicing this invention includes injecting a liquid under pressure into the open center of the tube 14 through the end cap. The fluid pressure causes the tube assembly 12, 14 to expand outwardly, bringing the exterior of the tube 12 into contact with the mold into which the tube assembly 12, 14 has been placed.

- 5 Consequently, the exterior of the outer tube 12 is forced to assume the shape of the mold. The inner tube 14 can also be drawn during the hydroforming operation at locations wherein the outer tube 12 is also drawn. In other words, the inner tube 14 can be deformed in the same manner as the outer tube 12, whether through the initial bending process or through the subsequent drawing process that occurs during hydroforming. Once the hydroforming  
10 process is completed, the kick bolt (not shown) is removed.

- Finally, after hydroforming the tube assembly 12, 14, the strength and stiffness of the hydroform 10 is increased by curing the structural foam 16. To cure the structural foam 16, the structural foam 16 is heated to a temperature sufficient to permit the structural foam 16 to expand and adhere to the inner surface of the outer tube 12. As the structural foam 16 is  
15 heated, it becomes chemically active and expands, forming a bond with the adjacent structure, the inner surface of the tube 12. The characteristics of the foam 16 can be provided by a separate adhesive layer in between the structural foam 16 and the inner surface of the tube 16, or it can be obtained from the formulation of the foam 16 itself.

- During the curing cycle, the structural foam 16 is heated to a temperature higher than  
20 the temperature used during application of the foam material 18 to the tube 14. This higher temperature causes activation of the expansion and curing properties of the structural foam 16 by initiating chemical decomposition of the blowing agent and curing agent additives. FIG. 4 illustrates the position of the structural foam 16 after the curing cycle. As shown, the structural foam 16 adheres to the inner surface of tube 12 and the outer surface of tube 14.  
25 After the curing process, the end caps (not shown) are removed.

- Upon cooling, the structural foam 16 stiffens and resists deformation during handling. Preferably, for cost and weight considerations, the structural foam 16 does not extend throughout the entire length of the tube assembly 12, 14. However, it will be appreciated that the structural foam 16 could be applied to the inner tube 14 so as to expand the entire length  
30 of the tubular assembly 12, 14.

Alternatively, the structural foam 16 may be applied to the tubular assembly 12, 14 using an extruder or injection process, wherein molten structural foam 16 is dispensed into key sections of the member to be reinforced. In this manner, the molten structural foam material 18 flows into the cavity to be reinforced. Another method for applying the structural

foam 16 to the tubular assembly 12, 14 includes using structural foam 16 pellets. The pellets are inserted into the cavity between the tubes 12, 14 and cured as described above.

Preferably, the structural foam 16 is applied to the assembly 12, 14 at the location to be reinforced, which is generally at bends or locations where the surface contour changes.

5 However, it will be appreciated that the structural foam 16 may be applied to the entire length of the hydroform 10 if desired.

The application of the structural foam 16 to the tube 14, increases the structural strength and stiffness of the tube 14. As a result, the overall structural strength and stiffness of the hydroform 10 is increased.

10 There are a variety of configurations that may be employed to fabricate a hydroform member 10. For instance, the hydroform 10 need not be fabricated as a tubular assembly but may comprise any configuration having a continuous perimeter and an open section therein. The disclosed embodiment is given to illustrate the invention. However, it is not intended to limit the scope and spirit of the invention. Therefore, the invention should be limited only by  
15 the appended claims.

CLAIMS

## WE CLAIM:

1. A reinforced hydroform, comprising:  
5 an outer structural member having an open bore; and  
a structural foam supported by the outer structural member, wherein the structural  
foam extends along at least a portion of the length of the outer structural member.
2. The reinforced hydroform as defined in claim 1, further including an inner  
10 structural member having an open section, the inner structural member being received in the  
bore of the outer structural member.
3. The reinforced hydroform as defined in claim 2, wherein the structural foam  
extends along at least a portion of the length of the inner structural member and the outer  
15 structural member.
4. The reinforced hydroform defined in claim 3, wherein the outer structural  
member is metal.
- 20 5. The reinforced hydroform defined in claim 3, wherein the inner structural  
member is metal.
6. The reinforced hydroform defined in claim 1, wherein the hydroform is  
coupled to an automobile frame system.
- 25 7. The reinforced hydroform defined in claim 1, wherein the hydroform is  
coupled to a building frame system.
8. The reinforced hydroform defined in claim 1, wherein the structural foam  
30 extends along at least a portion of the length of the bore.
9. The reinforced hydroform defined in claim 1, further comprising an adhesive  
layer disposed on at least a portion the structural foam.

10. The reinforced hydroform defined in claim 1, wherein the structural foam is an epoxy-based resin.

11. The reinforced hydroform defined in claim 10, wherein the structural foam is  
5 L5206 structural foam commercially available from L&L Products of Romeo, Michigan.

12. The reinforced hydroform defined in claim 10, wherein the structural foam is L5207 structural foam commercially available from L&L Products of Romeo, Michigan.

10 13. The reinforced hydroform defined in claim 10, wherein the structural foam is L5208 structural foam commercially available from L&L Products of Romeo, Michigan.

14. The reinforced hydroform defined in claim 10, wherein the structural foam is L5209 structural foam commercially available from L&L Products of Romeo, Michigan.

15

15. A reinforced hydroform, comprising:  
an outer elongated tubular bar having an open center;  
an elongated inner tubular bar having an open bore coextensive therewith, the inner tubular bar being received in the open center of the outer tubular bar so as to extend  
20 concentrically therewith; and  
a structural foam supported by the outer surface of the inner tubular bar, wherein the structural foam extends along at least a portion of the length of the inner tubular member.

16. The reinforced hydroform defined in claim 15, wherein the structural foam  
25 fills at least a portion of the diameter of the open center.

17. The reinforced hydroform defined in claim 15, wherein the structural foam extends along at least a portion of the length of the open center.

30 18. The reinforced hydroform defined in claim 15, further comprising an adhesive layer disposed on at least a portion of the structural foam.

19. The reinforced hydroform defined in claim 15, wherein the structural foam is an epoxy-based resin.

20. The reinforced hydroform defined in claim 19, wherein the structural foam is L5206 structural foam commercially available from L&L Products of Romeo, Michigan.

5 21. The reinforced hydroform defined in claim 19, wherein the structural foam is L5207 structural foam commercially available from L&L Products of Romeo, Michigan.

22. The reinforced hydroform defined in claim 19, wherein the structural foam is L5208 structural foam commercially available from L&L Products of Romeo, Michigan.

10

23. The reinforced hydroform defined in claim 19, wherein the structural foam is L5209 structural foam commercially available from L&L Products of Romeo, Michigan.

24. A method for forming a reinforced hydroform, comprising:  
15 providing an outer structural member having an open bore;  
reinforcing the outer structural member by applying a structural foam thereto;  
hydroforming the outer structural member, causing the exterior surface of the structural member to assume a desired configuration; and  
heating the structural foam to a temperature sufficient to cause the structural foam to  
20 expand and adhere to adjacent surfaces.

25. The method for forming a reinforced hydroform as defined in claim 24, further including the step of providing an inner structural member received in the open bore of the outer structural member so as to form a structural assembly.

25

26. The method for forming a reinforced hydroform as defined in claim 24, further including the step of reinforcing the structural assembly by applying a structural foam thereto.

30 27. The method for forming a reinforced hydroform as defined in claim 24, further including the step of applying an adhesive layer on the structural foam for adhering the structural foam to adjacent surfaces.

1/2

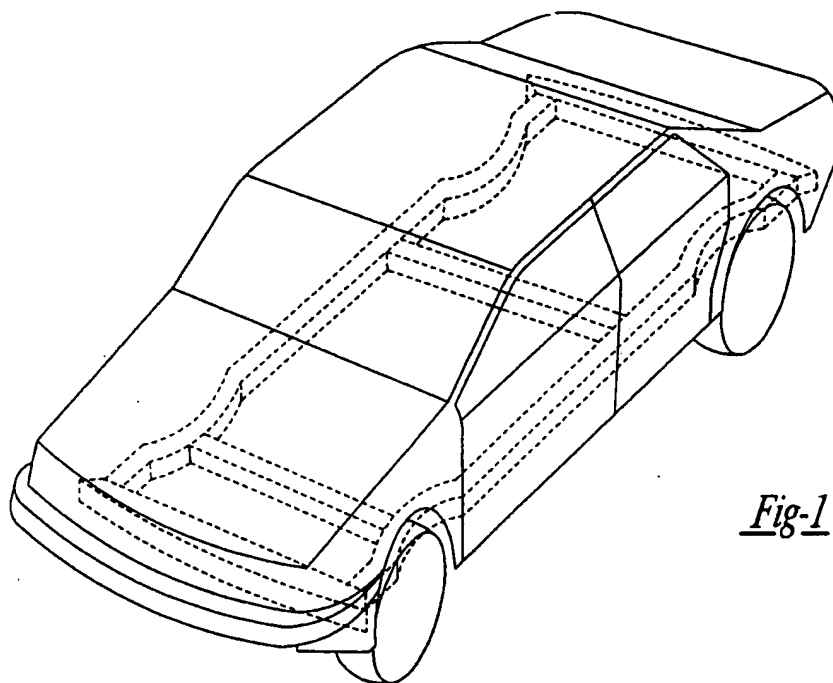


Fig-1

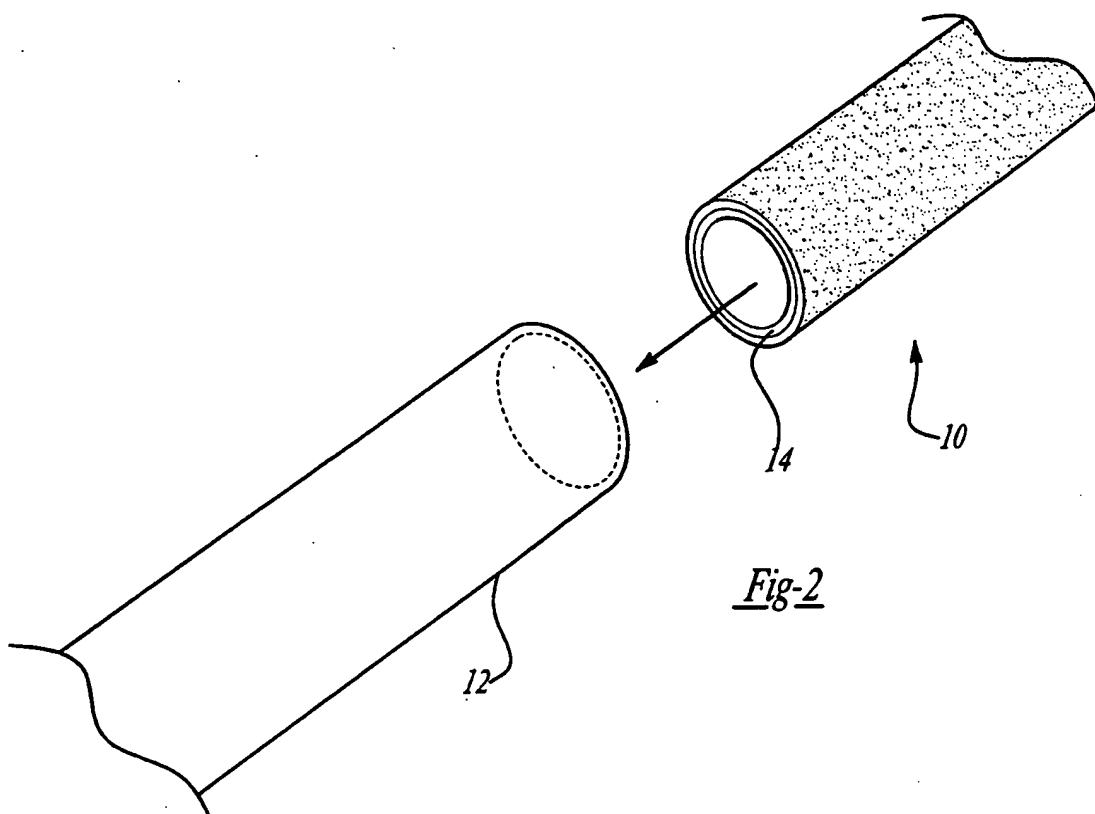
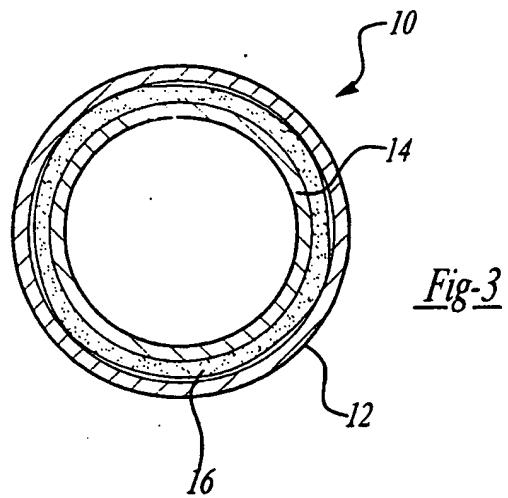
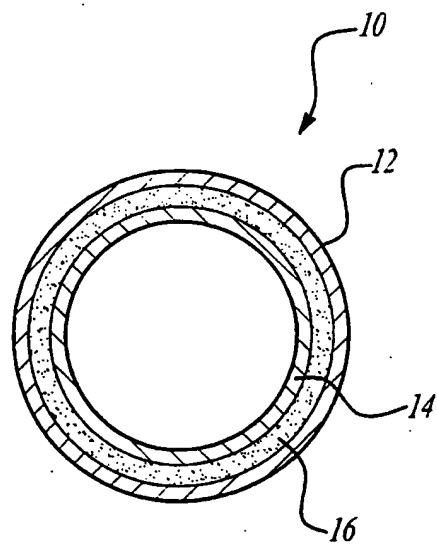


Fig-2


2/2



*Fig-4*



*Fig-5*

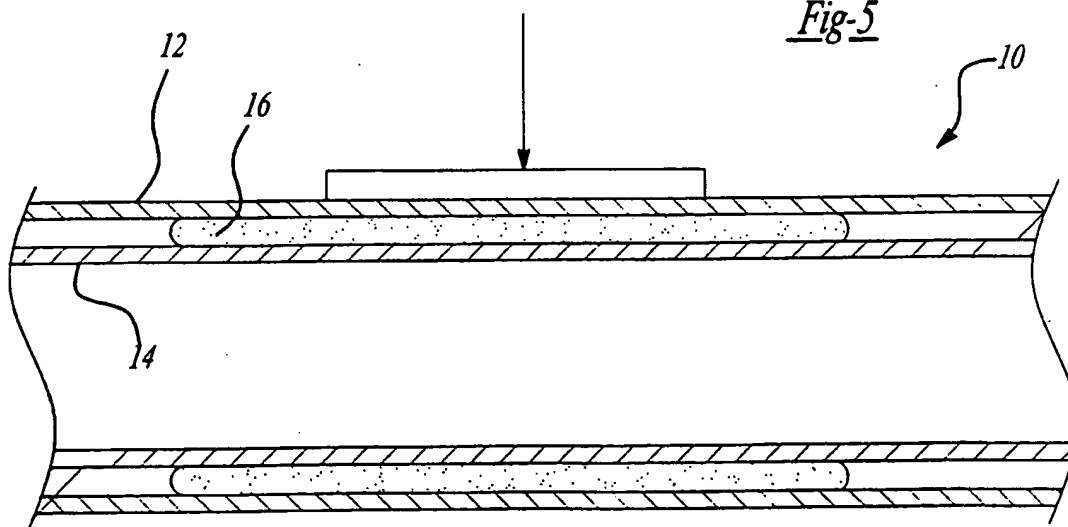

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
14 June 2001 (14.06.2001)

PCT

(10) International Publication Number  
**WO 01/41950 A3**

(51) International Patent Classification<sup>7</sup>: **B21D 26/02**

(21) International Application Number: **PCT/US00/42687**

(22) International Filing Date: 7 December 2000 (07.12.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/459,756 10 December 1999 (10.12.1999) US

(71) Applicant: **L & L PRODUCTS, INC.** [US/US]; 159 McLean Drive, Romeo, MI 48065 (US).

(72) Inventor: **CZAPLICKI, Michael, J.**; 1035 Pointe Place, Rochester, MI 48307 (US).

(74) Agent: **DOBRUSIN, Eric, M.**; Dobrusin Darden Thenisch & Lorenz PLLC, 401 South Old Woodward Avenue, Suite 311, Birmingham, MI 48009 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:  
— with international search report

(88) Date of publication of the international search report:  
7 February 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **HEAT-ACTIVATED STRUCTURAL FOAM REINFORCED HYDROFORM**

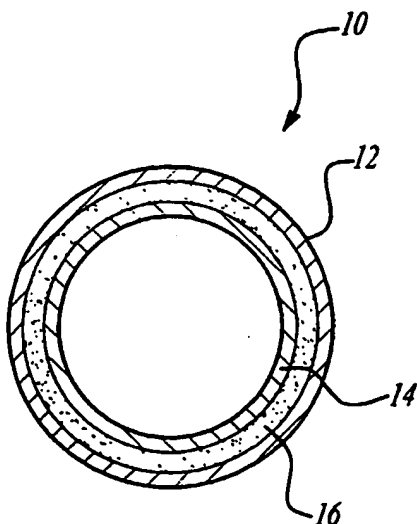

(57) Abstract: A reinforced hydroform member (10) having an outer structural member (12) reinforced by a structural foam (16) over an inner structural member (14). The structural foam (16) extends along at least a portion of the length of the outer structural member (14). The structural foam (16) is a heat-activated epoxy-based resin. As the foam is heated, it expands and adheres to adjacent surfaces.

WO 01/41950 A3



## INTERNATIONAL SEARCH REPORT

International Application No

PCT, US 00/42687

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B21D26/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B21D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 196 35 734 A (EBBINGHAUS ALFRED DIPL ING) 3 April 1997 (1997-04-03) column 3, line 10 -column 3, line 18; claims; figures 2,6 ---	1,6-14
X	WO 87 01978 A (SCHNEIDER GESENKSCHMIEDE) 9 April 1987 (1987-04-09) the whole document ---	1,15, 24-27
A	EP 0 679 501 A (YMOS AG IND PRODUKTE) 2 November 1995 (1995-11-02) claims; figures 3,4 ---	2,15-27
A	US 5 884 960 A (WYCECH JOSEPH S) 23 March 1999 (1999-03-23) ---	
A	WO 89 06595 A (SEIKISUI CHEMICAL CO LTD) 27 July 1989 (1989-07-27) ---	
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

12 October 2001

Date of mailing of the international search report

19/10/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Peeters, L

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/42687

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 197 53 658 A (FRAUNHOFER GES FORSCHUNG) 17 June 1999 (1999-06-17) ----	
A	US 3 649 375 A (VENKATESAN PERUVEMBA SWAMINATH) 14 March 1972 (1972-03-14) ----	
A	DE 299 04 705 U (MANNESMANN AG) 17 June 1999 (1999-06-17) -----	

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PC1/US 00/42687

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19635734	A	03-04-1997	DE 29514164 U1	09-01-1997
			DE 19635734 A1	03-04-1997
			AU 7489596 A	27-03-1997
			WO 9709134 A1	13-03-1997
			EP 1090697 A2	11-04-2001
			EP 0850113 A1	01-07-1998
			JP 11512171 T	19-10-1999
WO 8701978	A	09-04-1987	DE 3412633 A1	28-11-1985
			DE 3535513 A1	09-04-1987
			WO 8701978 A1	09-04-1987
			EP 0239571 A1	07-10-1987
			EP 0219614 A1	29-04-1987
			JP 62103133 A	13-05-1987
EP 0679501	A	02-11-1995	EP 0679501 A1	02-11-1995
			DE 29522122 U1	18-11-1999
			DE 69510417 D1	29-07-1999
			DE 69510417 T2	16-12-1999
			WO 9525005 A1	21-09-1995
			EP 0697956 A1	28-02-1996
			ES 2137505 T3	16-12-1999
			JP 8510703 T	12-11-1996
			US 5766719 A	16-06-1998
US 5884960	A	23-03-1999	US 5575526 A	19-11-1996
			BR 9713066 A	11-04-2000
			DE 938420 T1	09-03-2000
			EP 0938420 A1	01-09-1999
			ES 2137144 T1	16-12-1999
			JP 2001507647 T	12-06-2001
			TR 9901483 T2	21-09-1999
			US 6168226 B1	02-01-2001
			WO 9821060 A1	22-05-1998
			AU 2544895 A	18-12-1995
			BR 9507661 A	07-10-1997
			CA 2189348 A1	30-11-1995
			CZ 9603372 A3	14-05-1997
			DE 758965 T1	22-10-1998
			EP 0758965 A1	26-02-1997
			ES 2148117 T1	16-10-2000
			JP 10500917 T	27-01-1998
			PL 317261 A1	01-04-1997
			WO 9532110 A1	30-11-1995
WO 8906595	A	27-07-1989	JP 1959081 C	10-08-1995
			JP 6088333 B	09-11-1994
			JP 63082733 A	13-04-1988
			WO 8906595 A1	27-07-1989
DE 19753658	A	17-06-1999	DE 19753658 A1	17-06-1999
US 3649375	A	14-03-1972	BE 761899 A1	01-07-1971
			CH 564384 A5	31-07-1975
			DE 2102851 A1	12-08-1971
			FR 2077329 A5	22-10-1971
			GB 1315893 A	02-05-1973
			JP 51009321 B	26-03-1976

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 00/42687

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3649375	A	NL 7100759 A	28-07-1971
		SE 385791 B	26-07-1976
DE 29904705	U	17-06-1999	
		DE 19905124 C1	03-08-2000
		DE 29904705 U1	17-06-1999
		AU 2429000 A	31-07-2000
		WO 0038863 A1	06-07-2000
		EP 1140396 A1	10-10-2001